

Product Information

541 W

Product structure

Backing Fibre

Flexibility 

Grain Type Aluminium oxide

Coating Closed coat

Top Coat stearate special top coat

Manufactured Width 1400 mm 1430 mm 1650 mm others

Form 

Suitable for Hand grinding Hand held machine grinding Machine grinding



Grits

Ceramic, zirconia, # and * = non P-Grits

P 12 P 16 P 24 P 30 P 36 P 40 P 50 P 60 P 80 P 100 P 120 P 150 P 180 P 220 P 240

P 280 P 320 P 360 P 400 P 500 P 600 P 800 P 1.000 P 1.200 P 1.500 P 2.000 P 2.500 ST 3.000* ST 5.000* ST 7.000*

Materials

Aluminium
 Non-ferrous metal
 Stainless steel
 Steel
 Titanium
 Paint lacquer
 Glass
 Wood
 Plastics
 Stone/china


Application examples



Grinding of welding seams



Trimming of steel plates for welding

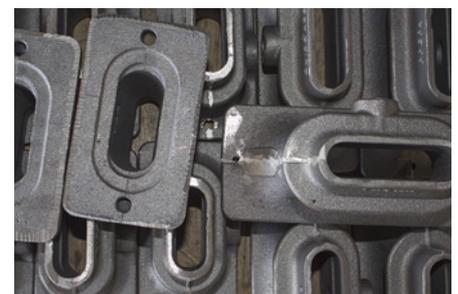

Deburring of iron casting workpieces

- Excellent force-transmission due to stiff fibre backing
- Less corner edge wear due to high-quality fibre backing
- High stock removal rates due to high-quality aluminium oxide abrasive grain

