

## Product Information

# 747 FS/NK

### Product structure

**Backing** Synthetic film

---

**Flexibility** 
low
1
5
10
15
extremely high
▼

---

**Grain Type** Aluminium oxide

---

**Coating** open

---

**Top Coat**  stearate  special top coat  
P 180 – P 2500, 3000

---


**Manufactured Width**  152 mm  1430 mm  1650 mm  others

---

**Form**

---

**Suitable for**  hand sanding  hand held machine sanding  machine sanding

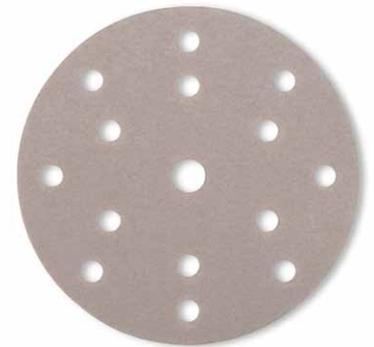

### Grits

Ceramic, zirconia, # and \* = non P-Grits

P 12  P 16  P 24  P 30  P 36  P 40  P 50  P 60  P 80  P 100  P 120  P 150  P 180  P 220  P 240  
 P 280  P 320  P 360  P 400  P 500  P 600  P 800  P 1000  P 1200  P 1500  P 2000  P 2500  3000  5000  7000

### Materials

Aluminium  Non-ferrous metal  Stainless steel  Steel  Titanium  Paint lacquer  Glass  Wood  Plastics  Stone/china

### Application examples



Car body crash repair



Aluminum grinding



Steel sheet surface finishing

### Advantages in sanding

- Low surface roughnesses ensure perfect coating
- High-quality abrasive grain for high stock removal rate
- Long service life thanks to innovative anti-loading system (from P 180)
- No edge shelling due to the strong film backing

